


Features

-) Compatible with all Gill ignition modules
-) All version have an SAE Male terminal for the secondary connection
-) The SM 60 series coils can be mounted on the same bolt pattern as the larger industry standard coils.

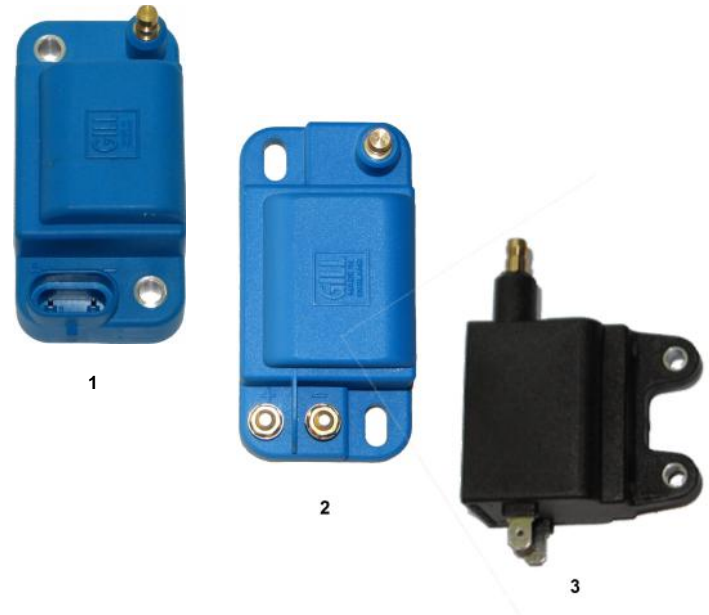

Available in three variations for ease of application on a wide range and variety of engines - including forklifts and even motorcycles (FM 40 T) . This design allows for continuous spark duration up to 1,500 microseconds - about 3 times longer than the typical CD (capacitor discharge) systems on the market today. The SM 60 series and the FM 40 series are designed with an SAE MALE secondary connection (same standard as a spark plug connection) . Secondary leads for these coils are available at Kraft Power.

Selection Guide

Part Number	DESCRIPTION	Version
1395-10-022	SM 60 A version - requires connector kit for primary 1395-PK-023	1
1395-10 -002	SM 60 T version - a # 10 ring terminal fits the coil stud	2
1317-10-010	FM 40 requires 1/4" female spade terminal connection	3

NOTE: Inductive coils are not interchangeable with CD (Capacitor Discharge) coils.